





PLEASE MAKE SURE THAT MAINS IS DISCONNECTED BEFORE PROCEEDING!

FOR 3 CIRCUIT AC / 1 CIRCUIT AC + DATA


Follow the steps as illustrated below



1. Adjust local brightness & attach fixture to track adapter.



2. Secure the fixture by locking.



3. Assembly complete.

For connection between BFN LED modules and drivers, please refer to LED Module Installation Guide.

SAFETY WARNING

- Luminaires MUST be installed by licensed electrician in accordance with local standards.
- LED modules MUST ONLY be connected to supplied LED drivers. It is not compatible with any other type of driver. Failure to adhere to this may cause damage and void warranty.
- DO NOT COVER lamp or driver under any
- Ensure mains supply is not energised and/or is disconnected prior to installation/connection/disconnection of LED module from LED driver.
- Luminaires must not be Megger tested or connected during any in-circuit testing.
- . No user serviceable parts. Do not attempt to
- Do not use in flammable or explosive environments.
- . Do not attempt to modify luminaires or supplied wiring in any way
- Allow suitable air flow and ventilation around


DIMMER COMPATIBILITY DECLARATION

Our Luminaires are designed for industry and home commonly used standard phase dimmers for best lighting effect achievement to provide added value to customers.

However, with thousands of dimmer models available in Indiversel, with thousands of dimmer infloates available in the market today, 100% compatibility cannot be guaranteed. In order to avoid disappointment, it is advised to use dimmer models that have been tested to be compatible. The latest information on dimming compatibility is available within our Dimmer Compatibility Card and can be obtained through our website and local distributors.

If any intended dimmer model to be used is not listed in in any interfact unified mode of 20 decent and instead in our Dimmer Compatibility Card, kindly contact us and send in the dimmer to be tested. We will respond within the shortest possible time and advise on the compatibility with our luminaires.

We will not be responsible for all losses due to the incompatibility of the dimmer with our luminaires. Incompatibility includes abnormal operations i.e., flicker, throb, delayed on/off, failure, narrow dimming ranges, etc. and are not limited to the above mentioned






TRACK SYSTEM - SURFACE **INSTALLATION GUIDE**

Borrowed from Nature


PLEASE MAKE SURE THAT MAINS IS DISCONNECTED BEFORE PROCEEDING!

FOR 3 CIRCUIT AC / 1 CIRCUIT AC + DATA


Follow the steps as illustrated below




1. Secure surface mounted track onto ceiling with screw.




2. Attach track luminaire onto surface mounted track.




3. Assembly complete.



Follow the connecting steps as illustrated below



1. Connect connector.



2. Tighten the screw.

SAFETY WARNING

- Product MUST be installed by a licensed electrician in accordance with local standards.
- LED lamp MUST ONLY be connected to supplied our constant current LED driver. It is not compatible with any other type of driver. Failure to adhere to this may damage fitting and will void warranty.
- DO NOT COVER lamp or driver under any circumstances. Ensure main supply is not energised and/or disconnected prior to installation and connected/disconnection of lamp from driver.
- This fitting must not be Megger tested or connected during any in-circuit testing.

 No user serviceable parts. Do not attempt to disassemble or repair larmy or driver.
- Do not use in flammable or explosive environments.
- Do not attempt to modify fitting or supplied wiring in any way Allow suitable air flow and ventilation around the fitting.


DIMMER COMPATIBILITY DECLARATION

Our Luminaires are designed for industry and home commonly used standard phase dimmer for best lighting effect achievement and provide additional values to our customer.

and provide additional values to our customer. However, with thousands of dimmer models available in the market today, we cannot guarantee 100% compatibility. In order to avoid disappointment, our best advise is to use dimmer models that have been tested by us. The latest information of dimming compatibility will be available within our Dimmer Compatibility Card and can be obtained through our website and your local distributors.

If you have any dimmer model that is not within our Dimmer Compatibility Card, please kindly contact us and send in your dimmer to get tested. We will response to you within the shortest possible time and advise you about the compatibility to our Luminaires.

We will not be responsible for all losses due to the incompatibility of the dimmer to our Luminaires. Incompatibility includes abnormal operation, i.e flicker, throb, delayed on/off, failure, narrow dimming ranges etc. and not limited to the above mentioned conditions.

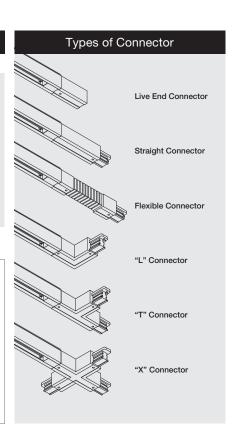





TRACK SYSTEM - RECESSED **INSTALLATION GUIDE**


PLEASE MAKE SURE THAT MAINS IS DISCONNECTED BEFORE PROCEEDING!

FOR 3 CIRCUIT AC / 1 CIRCUIT AC + DATA


Follow the steps as illustrated below









- and depth.
- 1. Allocation of ceiling trench width 2. Secure recessed mounted track onto ceiling trench with screw.
- 3. Attach track luminaire onto recessed mounted track.






4. Assembly complete.

Follow the connecting steps as illustrated below





2. Tighten the screw.

1. Connect connector.

SAFETY WARNING

- Product MUST be installed by a licensed electrician in accordance with local standards.
- LED lamp MUST ONLY be connected to supplied our constant current LED driver. It is not compatible with any other type of driver. Failure to adhere to this may damage fitting and will void warranty.
- DO NOT COVER lamp or driver under any circumstances. Ensure main supply is not energised and/or disconnected prior to installation and connected/disconnection of lamp from driver.
- This fitting must not be Megger tested or connected during any in-circuit testing.

 No user serviceable parts. Do not attempt to disassemble or repair larmy or driver.
- Do not use in flammable or explosive environments.
- Do not attempt to modify fitting or supplied wiring in any way Allow suitable air flow and ventilation around the fitting.


DIMMER COMPATIBILITY DECLARATION

Our Luminaires are designed for industry and home commonly used standard phase dimmer for best lighting effect achievement and provide additional values to our customer.

and provide additional values to our customer. However, with thousands of dimmer models available in the market today, we cannot guarantee 100% compatibility. In order to avoid disappointment, our best advise is to use dimmer models that have been tested by us. The latest information of dimming compatibility will be available within our Dimmer Compatibility Card and can be obtained through our website and your local distributors.

If you have any dimmer model that is not within our Dimmer Compatibility Card, please kindly contact us and send in your dimmer to get tested. We will response to you within the shortest possible time and advise you about the compatibility to our Luminaires.

We will not be responsible for all losses due to the incompatibility of the dimmer to our Luminaires. Incompatibility includes abnormal operation, i.e flicker, throb, delayed on/off, failure, narrow dimming ranges etc. and not limited to the above mentioned conditions.

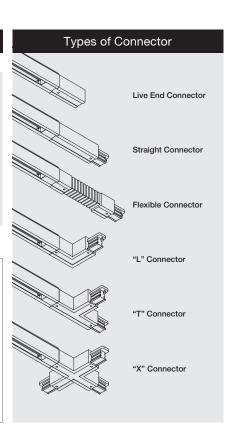




TRACK SYSTEM - SUSPENSION KIT **INSTALLATION GUIDE**

Borrowed from Nature


PLEASE MAKE SURE THAT MAINS IS DISCONNECTED BEFORE PROCEEDING!

FOR 3 CIRCUIT AC / 1 CIRCUIT AC + DATA


Follow the steps as illustrated below




1. Secure ceiling bracket onto ceiling with screw.

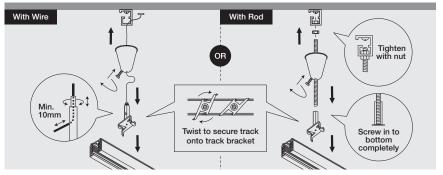


2. Attach wire/rod onto ceiling bracket and track bracket, cover ceiling bracket with cap and secure track onto track bracket.




3. Attach track luminaire onto suspended track.




4. Assembly complete.



Follow the connecting steps as illustrated below



1. Connect connector.



2. Tighten the screw.

SAFETY WARNING

- Product MUST be installed by a licensed electrician in accordance with local standards.
- LED lamp MUST ONLY be connected to supplied our constant current LED driver. It is not compatible with any other type of driver. Failure to adhere to this may damage fitting and will void warranty.
- DO NOT COVER lamp or driver under any circumstances. Ensure main supply is not energised and/or disconnected prior to installation and connected/disconnection of lamp from driver.
- This fitting must not be Megger tested or connected during any in-circuit testing.

 No user serviceable parts. Do not attempt to disassemble or repair larmy or driver.
- Do not use in flammable or explosive environments.
- Do not attempt to modify fitting or supplied wiring in any way Allow suitable air flow and ventilation around the fitting.


DIMMER COMPATIBILITY DECLARATION

Our Luminaires are designed for industry and home commonly used standard phase dimmer for best lighting effect achievement and provide additional values to our customer.

and provide additional values to our customer. However, with thousands of dimmer models available in the market today, we cannot guarantee 100% compatibility. In order to avoid disappointment, our best advise is to use dimmer models that have been tested by us. The latest information of dimming compatibility will be available within our Dimmer Compatibility Card and can be obtained through our website and your local distributors.

If you have any dimmer model that is not within our Dimmer Compatibility Card, please kindly contact us and send in your dimmer to get tested. We will response to you within the shortest possible time and advise you about the compatibility to our Luminaires.

We will not be responsible for all losses due to the incompatibility of the dimmer to our Luminaires. Incompatibility includes abnormal operation, i.e flicker, throb, delayed on/off, failure, narrow dimming ranges etc. and not limited to the above mentioned conditions.

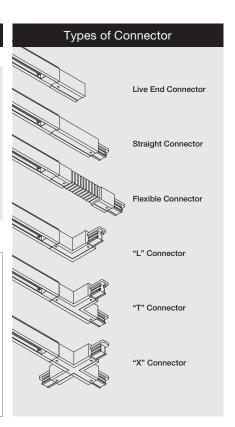



PLEASE MAKE SURE THAT MAINS IS DISCONNECTED BEFORE PROCEEDING!

