


# SNOOP 3 PENDANT

PENDANT MOUNTED LUMINAIRE

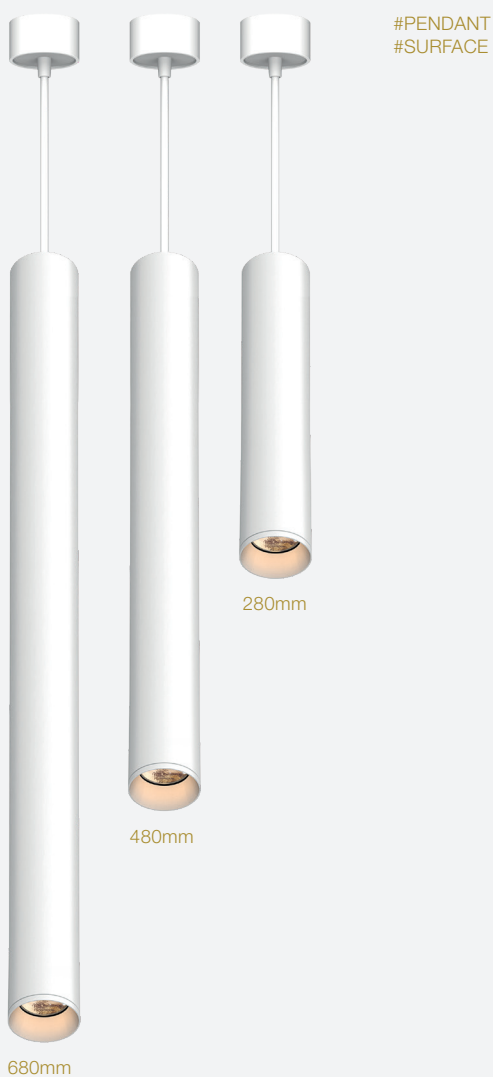

## Pendant

### AVAILABLE OPTIONS

#### FIXTURE COLOUR OPTIONS

##### Trim Colour Options

MATT WHITE  
RAL9003

MATT BLACK  
RAL9011

MATT WHITE RAL9003

MATT BLACK RAL9011

##### Reflector Colour Options

WHITE / BLACK

CHROME BLACK

CHROME GOLD

#### LED MODULE



35P-BM

##### DAPPLE - 4 MODES



Cool  
Graphite



Warm  
Graphite



Golden



Silver

##### RIPPLE



Ivory



Aqua



Golden

| 20° | 35° | 55° | 60° |
|-----|-----|-----|-----|
|     |     |     |     |
| ✓   | ✓   |     | ✓   |
|     |     | ✓   |     |

#### CONTROL INTERFACE



(DA)



(AN)\*

\*0-10V is valid for brightness control only. Light theme and movement have to be configured via wireless configurator.

#### INPUT




(24V)


# SNOOP 3 PENDANT

DIMENSIONS (MM)

- A1 : 680mm  
A2 : 1000mm  
A3 : 48mm  
A4 : Ø68
- B1 : 480mm  
B2 : 1000mm  
B3 : 48mm  
B4 : Ø68
- C1 : 280mm  
C2 : 1000mm  
C3 : 48mm  
C4 : Ø68

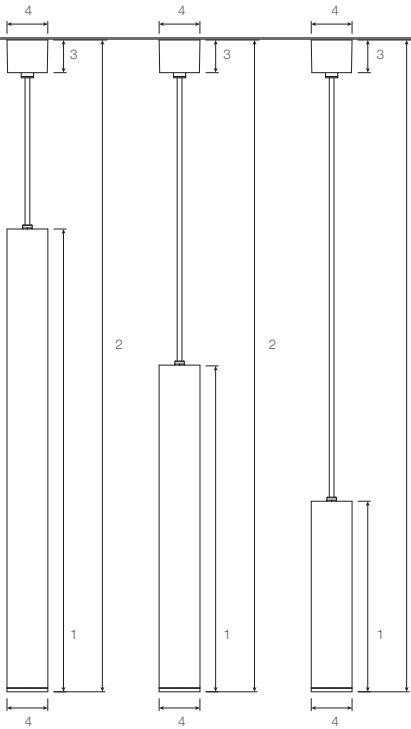

## SNOOP 3 PENDANT

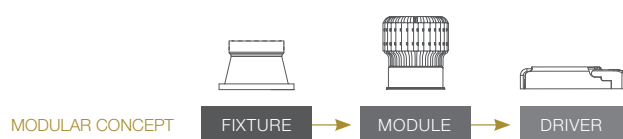

## SPECIFICATIONS

| FIXTURE                   |                                                                            |
|---------------------------|----------------------------------------------------------------------------|
| Family Type               | Snoop series                                                               |
| Fixture Colours           | Matt white, matt black                                                     |
| Reflector Colours         | Matt white, matt black, matt white / matt black, chrome black, chrome gold |
| Materials                 | Aluminium                                                                  |
| Ingress Protection        | IP40                                                                       |
| Weight                    | 780g (280mm), 1.1kg (480mm), 1.5kg (680mm)                                 |
| LED MODULE & DRIVER       |                                                                            |
| Family Type               | 35 series LED modules                                                      |
| Typical Operating Voltage | 24V                                                                        |
| Typical Operating Current | 330mA                                                                      |
| System / Input Power      | 8W                                                                         |
| Colour                    | Black                                                                      |
| Materials                 | Aluminium, plastic, glass                                                  |
| Compatibility             | Compatible with ELR size-3 fixtures                                        |
| Lifetime                  | 100,000 hours (80% lumen maintenance at Ta = 25°C), B10                    |

|                     |                                                                                                |
|---------------------|------------------------------------------------------------------------------------------------|
| Beam Angles         | Dapple - 20°, 35°, 60°<br>Ripple - 55°                                                         |
| Light Theme         | Dapple - 4 modes: Cool Graphite, Warm Graphite, Golden, Silver<br>Ripple - Ivory, Aqua, Golden |
| Ingress Protection  | IP54                                                                                           |
| Weight              | 160g                                                                                           |
| Control Interface   | Activator with DALI interface                                                                  |
| Configuration       | Light theme, brightness and movement are configurable via DALI or wireless configurator        |
| Mains Voltage       | 24V DC constant voltage                                                                        |
| Fire Safety         | Glow wire test 850°C, UL94V-0, VW-1                                                            |
| Flammability Mark   | F                                                                                              |
| Safety Class        | Class 3                                                                                        |
| Standards           | IEC 62031                                                                                      |
| Regulatory Markings | CE, RoHS                                                                                       |

## PHOTOMETRICS

## 35 PRO B-MODULE DAPPLE



| Height<br>(m) |            | Emax (lx) |      |      | ELR LED Module        |        |            | 35P-BM |
|---------------|------------|-----------|------|------|-----------------------|--------|------------|--------|
|               |            | 20°       | 35°  | 60°  | Input Power (24CV)    |        |            | 8W     |
| 1             | E(0°)      | 2216      | 1863 | 368  | Luminous Flux<br>(lm) | Type   | Beam Angle |        |
|               | Cone Ø (m) | 0.47      | 0.66 | 1.37 |                       | Dapple | 20°        | 256    |
| 2             | E(0°)      | 554       | 466  | 92   |                       |        | 35°        | 323    |
|               | Cone Ø (m) | 0.94      | 1.32 | 2.74 |                       |        | 60°        | 596    |
| 3             | E(0°)      | 246       | 207  | 41   |                       |        |            |        |
|               | Cone Ø (m) | 1.41      | 1.98 | 4.11 |                       |        |            |        |
| 4             | E(0°)      | 139       | 116  | 23   |                       |        |            |        |
|               | Cone Ø (m) | 1.88      | 2.64 | 5.48 |                       |        |            |        |
| 5             | E(0°)      | 89        | 75   | 15   |                       |        |            |        |
|               | Cone Ø (m) | 2.35      | 3.30 | 6.85 |                       |        |            |        |

## 35 PRO B-MODULE RIPPLE



| Height<br>(m) |            | Emax (lx) |  | ELR LED Module        |        |            | 35P-BM |
|---------------|------------|-----------|--|-----------------------|--------|------------|--------|
|               |            | 55°       |  | Input Power (24CV)    |        |            | 8W     |
| 1             | E(0°)      | 135       |  | Luminous Flux<br>(lm) | Type   | Beam Angle | 154    |
|               | Cone Ø (m) | 1.33      |  |                       | Ripple | 55°        |        |
| 2             | E(0°)      | 34        |  |                       |        |            |        |
|               | Cone Ø (m) | 2.66      |  |                       |        |            |        |
| 3             | E(0°)      | 15        |  |                       |        |            |        |
|               | Cone Ø (m) | 3.99      |  |                       |        |            |        |
| 4             | E(0°)      | 8         |  |                       |        |            |        |
|               | Cone Ø (m) | 5.32      |  |                       |        |            |        |
| 5             | E(0°)      | 5         |  |                       |        |            |        |
|               | Cone Ø (m) | 6.65      |  |                       |        |            |        |

**FIXTURE ORDERING MATRIX CHART**

| Fixture             |           |       |           |            |                        |
|---------------------|-----------|-------|-----------|------------|------------------------|
| Type                | Length    |       | Colour    |            | Reflector Colour       |
| <b>SNOOP-3PM-DP</b> | <b>28</b> | 280mm | <b>WH</b> | Matt White | <b>WH</b> Matt White   |
|                     | <b>48</b> | 480mm | <b>MB</b> | Matt Black | <b>MB</b> Matt Black   |
|                     | <b>68</b> | 680mm |           |            | <b>CR</b> Chrome       |
|                     |           |       |           |            | <b>CB</b> Chrome Black |
|                     |           |       |           |            | <b>CG</b> Chrome Gold  |

example: SNOOP-3PM-DP28.WH.WH

\* Custom RAL colour options available.

**LED MODULE & DRIVER ORDERING MATRIX CHART**

| LED Module         |    |            |     |                            | Control   |        |
|--------------------|----|------------|-----|----------------------------|-----------|--------|
| Input Power        |    | Beam Angle |     | Light Theme                | Interface |        |
| <b>ELR35P-BM.8</b> | 8W | <b>20</b>  | 20° | <b>D4</b> Dapple - 4 Modes | <b>DA</b> | DALI   |
|                    |    | <b>35</b>  | 35° |                            | <b>AN</b> | 0-10V* |
|                    |    | <b>60</b>  | 60° |                            |           |        |

example: ELR35P-BM.8.35.D4.DA

\* 0-10V is valid for brightness control only. Light theme and movement have to be configured via wireless configurator. Wireless configurator is sold separately.

| LED Module         |    |            |     |                              | Control   |        |
|--------------------|----|------------|-----|------------------------------|-----------|--------|
| Input Power        |    | Beam Angle |     | Light Theme                  | Interface |        |
| <b>ELR35P-BM.8</b> | 8W | <b>55</b>  | 55° | <b>R1-IV</b> Ripple - Ivory  | <b>DA</b> | DALI   |
|                    |    |            |     | <b>R1-AQ</b> Ripple - Aqua   | <b>AN</b> | 0-10V* |
|                    |    |            |     | <b>R1-GD</b> Ripple - Golden |           |        |

example: ELR35P-BM.8.55.R1-GD.DA

\* 0-10V is valid for brightness control only. Light theme and movement have to be configured via wireless configurator. Wireless configurator is sold separately.