

VASARI 3 PRO


RECESSED ROUND FIX / TILT DOWNLIGHT LUMINAIRE



#ROUND
#FIX
#TRIM



#ROUND
#TILT
#TRIM



#ROUND
#FIX
#TRIMLESS



#ROUND
#TILT
#TRIMLESS

TECHNOLOGY AND FEATURES



Ceiling
Safe

AVAILABLE OPTIONS

FIXTURE COLOUR OPTIONS	Trim Colour Options	Reflector Colour Options				
		MATT WHITE RAL9003	MATT BLACK RAL9011	CHROME	CHROME BLACK	CHROME GOLD
	MATT WHITE RAL9003					
	MATT BLACK RAL9011					


LED MODULE	 35P-BM				
		20°	35°	55°	60°
*Configurable by DALI or Wireless Configurator.	DAPPLE - 4 MODES  Cool Graphite  Warm Graphite  Golden  Silver	✓	✓		✓
	RIPPLE  Ivory  Aqua  Golden			✓	

CONTROL INTERFACE	 DALI DIMMABLE (DA)  0-10V DIMMABLE (AN)*
*0-10V is valid for brightness control only. Light theme and movement have to be configured via wireless configurator.	

INPUT	 24V (24V)
-------	--

VASARI 3 PRO

#ROUND
#FIX
#TILT
#TRIM
#TRIMLESS

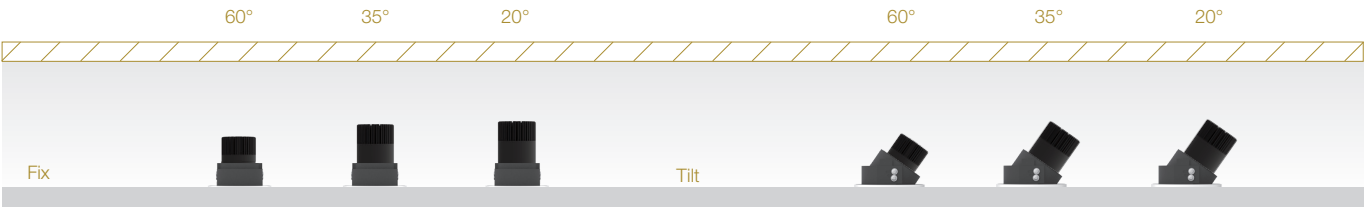


DIMENSIONS (MM)					Height (h)		
ROUND	Trim	Trimless	Fix	Tilt	Module	Fix	Tilt
	Ø92	Ø80			35P-BM (60°)	105	108
					35P-BM (35°)	119	122
					35P-BM (20°)	121	124

Trim: Ø84
Trimless: Ø82
cutout

(h)

+35°

VASARI 3 PRO

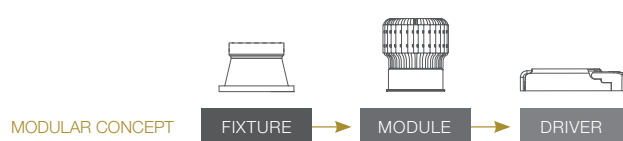

SPECIFICATIONS

FIXTURE	
Family Type	Vasari Pro series
Fixture Colours	Matt white, matt black
Reflector Colours	Matt white, matt black, chrome, chrome black, titanium gold
Materials	Aluminium
Accessories	Honeycomb anti-glare louvre, soft lens, linear spread lens, Comfort Pro
Ingress Protection	IP40 (fixture face only)
Weight	225g
LED MODULE & DRIVER	
Family Type	35 series LED modules
Typical Operating Voltage	24V
Typical Operating Current	330mA
System / Input Power	8W
Colour	Black
Materials	Aluminium, plastic, glass
Compatibility	Compatible with ELR size-3 fixtures
Lifetime	100,000 hours (80% lumen maintenance at Ta = 25°C), B10

Beam Angles	Dapple - 20°, 35°, 60° Ripple - 55°
Light Theme	Dapple - 4 modes: Cool Graphite, Warm Graphite, Golden, Silver Ripple - Ivory, Aqua, Golden
Ingress Protection	IP54
Weight	160g
Control Interface	Activator with DALI interface
Configuration	Light theme, brightness and movement are configurable via DALI or wireless configurator
Mains Voltage	24V DC constant voltage
Fire Safety	Glow wire test 850°C, UL94V-0, VW-1
Flammability Mark	F
Safety Class	Class 3
Standards	IEC 62031
Regulatory Markings	CE, RoHS

PHOTOMETRICS

35 PRO B-MODULE DAPPLE



Height (m)		Emax (lx)			ELR LED Module			35P-BM
		20°	35°	60°	Input Power (24CV)			8W
1	E(0°)	2216	1863	368	Luminous Flux (lm)	Type	Beam Angle	
	Cone Ø (m)	0.47	0.66	1.37		Dapple	20°	256
2	E(0°)	554	466	92			35°	323
	Cone Ø (m)	0.94	1.32	2.74			60°	596
3	E(0°)	246	207	41				
	Cone Ø (m)	1.41	1.98	4.11				
4	E(0°)	139	116	23				
	Cone Ø (m)	1.88	2.64	5.48				
5	E(0°)	89	75	15				
	Cone Ø (m)	2.35	3.30	6.85				

35 PRO B-MODULE RIPPLE



Height (m)		Emax (lx)		ELR LED Module			35P-BM
		55°		Input Power (24CV)			8W
1	E(0°)	135	Luminous Flux (lm)	Type	Beam Angle		
	Cone Ø (m)	1.33		Ripple	55°	154	
2	E(0°)	34					
	Cone Ø (m)	2.66					
3	E(0°)	15					
	Cone Ø (m)	3.99					
4	E(0°)	8					
	Cone Ø (m)	5.32					
5	E(0°)	5					
	Cone Ø (m)	6.65					

FIXTURE ORDERING MATRIX CHART

Fixture										
Type	Trim Options		Shape		Angle		Colour		Reflector Colour	
VASARI-3PRO	_____		_____		_____		_____		_____	
	T	Trim	RD	Round	FX	Fix	WH	Matt White	WH	Matt White
	X	Trimless			TL	Tilt	MB	Matt Black	MB	Matt Black
									CR	Chrome
									CB	Chrome Black
									CG	Chrome Gold

example: VASARI-3PRO.T.RD.TL.WH.WH

* Custom RAL colour options available.

LED MODULE & DRIVER ORDERING MATRIX CHART

LED Module					Control	
Input Power	Beam Angle		Light Theme		Interface	
ELR35P-BM.8	_____		_____		_____	
	8W	20 20°	D4	Dapple - 4 Modes	DA	DALI
		35 35°			AN	0-10V*
		60 60°				

example: ELR35P-BM.8.35.D4.DA

* 0-10V is valid for brightness control only. Light theme and movement have to be configured via wireless configurator. Wireless configurator is sold separately.

LED Module					Control	
Input Power	Beam Angle		Light Theme		Interface	
ELR35P-BM.8	_____		_____		_____	
	8W	55 55°	R1-IV	Ripple - Ivory	DA	DALI
			R1-AQ	Ripple - Aqua	AN	0-10V*
			R1-GD	Ripple - Golden		

example: ELR35P-BM.8.55.R1-GD.DA

* 0-10V is valid for brightness control only. Light theme and movement have to be configured via wireless configurator. Wireless configurator is sold separately.